






**HEAD OFFICE**  
c/ Orient, 78-84  
2ª Planta Oficina 16-17  
08172 Sant Cugat del Vallès  
Barcelona (Spain)

+34 935 878 784

**FACTORY**  
c/Fonoll, 1  
Poligon Industrial d'Olius  
25286 Olius  
Lleida (Spain)

+34 973 484 060

[www.fytisa.com](http://www.fytisa.com)

-  [hello@textfel.com](mailto:hello@textfel.com)
-  [www.textfel.com](http://www.textfel.com)
-  [textfel\\_designfelt](https://www.instagram.com/textfel_designfelt)

Textfel<sup>®</sup>

We make felt for architects,  
designers and textile lovers

# Texfel® Interiors

Design PET felts with a velour surface for wallcovering and acoustic solutions

## Texfel® Interiors 200

Weight 200 g/m<sup>2</sup>  
Thickness 1,75 mm


25 lm (length)  
200 cm (width)



## Texfel® Interiors 500

Weight 500 g/m<sup>2</sup>  
Thickness 3 mm


20 lm (length)  
200 cm (width)

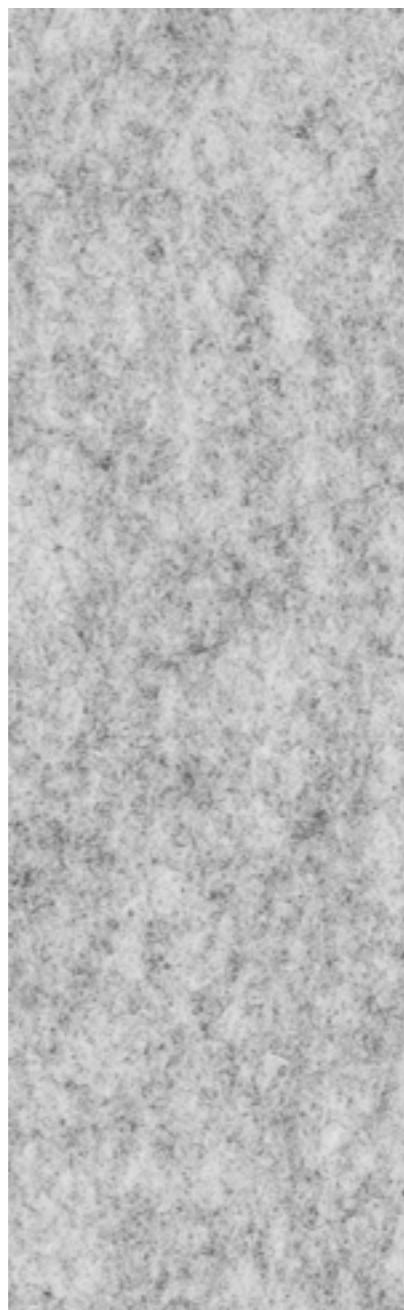

## Texfel® Interiors 800

Weight 800 g/m<sup>2</sup>  
Thickness 5 mm

15 lm (length)  
200 cm (width)

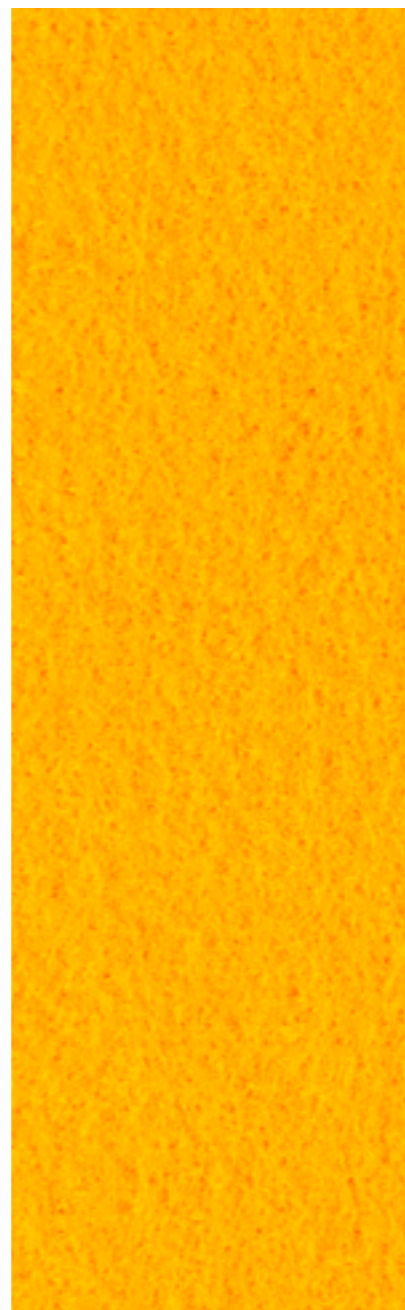

**Composition**  
100% PET

**Abrasion Resistance**  
UNE-EN 14465+A1: Class A  
ISO 12947-2 / AC: > 50.000 Rubs

**Flame Retardancy**  
EN 13501-1+A1: B-s1, d0  
ASTM E-84-18: Class A

**Environment**  
Recyclable, Low VOC, REACH, EPD  
and STANDARD 100 by OEKO-TEX®

**Sound Absorption**  
UNE-EN ISO 354: αW = 0,15 (H)  
EN ISO 11654: Class E



## Colours

### SOLID



### MELANGE



Possible slight colour differences between dye batches or colour card editions | Please ask for other colour options  
Colour fastness to light (according to EN ISO 105-B02) per colour: ••• Very good (7-8) •• Good (5-6) • Regular (3-4)